

Office Surface Light with Uplighting

LED light for offices. Suitable for suspending or surface fitting. Has an uplighting element.



Certification :


Meets AS/NZS 61347 Contained in ENEC and SAA

LM-79, LM-80, TM-21, CE, ROHs, TUV



LM-79

LM-80

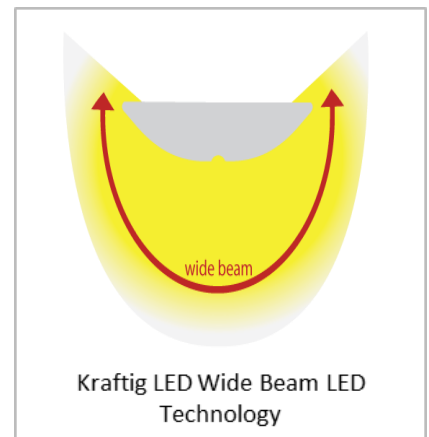

Specifications

- Excellent class leading overall > 150lm/cw efficiency
- Available in 35W and 50W LED
- Equivalent to 2x35W or 2x49W T5
- > 240 degree beam helps designed achieve LG7
- Meets CAT2(L≤ 1000cd/m²)
- >50% energy saving than T5
- Working temp. -20C to +60C
- Lifetime > 70,000hrs to L70
- Body: Aluminium, ABS and PMMA
- Light output optimised with MicroCellular Reflective Sheet (99.9%)
- UGR <19. Diamond micro-prismatic lens LED optimised High Haze (>95%)(UGR<16)
- Warranty 5 years

Model Codes

- KROWB35W: 1192x356x80mm
- KROWB50W: 1192x356x80mm

Meanwell Driver as standard

Add:

- "-DALI" for dali dimming,
- "-110V" for 1-10V dimming
- "-SEN" for on/off microwave sensor
- "-EM" for 3hr emergency model

Electrical Characteristics

- Light Source: Taiwanese LEDs
- Input Voltage: 85-285V AC
- Power Factor: > 0.95
- Driver Efficiency: > 0.91
- Lumen Deprecation: < 1 % at 6000hrs @55C
- CCT: 2700K, 3000K, 3500K, 4000K (3-Step MacAdam)
- CRI: > 85ra (CRI Available > 95ra)



Finishes: Anodised, Glossy Silver, Matt Silver, Matt Grey, Matt Black, Glossy Wine Red